

Care 600

Ceramic Wall Basin

Basin Size: 600mm x 445mm (nominal)

Vitreous China Shroud



Tapware shown not included.

The **Care 600** wall basin has been specifically designed to comply with the Australasian Health Facility Guidelines Part D - Infection Prevention and Control. This basin complies with requirements for Type C Non-Clinical Basin and are to be used in areas requiring general staff, patient and public amenities hand-washing. Taps used with this basin should be either wall-mounted or basin mounted. The design offers smooth rounded contours and clean lines incorporating an optional integrated shroud. This basin is also suitable for domestic, commercial and accessible applications & complying to AS 1428.1-2009 Amd. 1*.

Tap Holes: Basin available in: No tap holes Code No.873100 and one tap hole Code No.873110

Waste Outlet: The basin has been designed for the Caroma Chrome Waste (supplied) which is suitable for a 40mm trap connection. Alternative waste options are available — Vandal Resistant Flush Fitting Chrome Waste Code No.687141, Covered Chrome Plug and Waste Code No.687142, Vandal Resistant Covered Chrome Plug and Waste Code No.687143.

Shroud: Optional Opal Shroud, Code No.632601 completely conceals P-trap waste pipe fittings, concealed fixing bracket supplied. 40mm Caroma short plastic P-trap is required for correct installation Code No.102115.

Note: It is essential for the installation of the shroud to the basin that clearance is provided for the shroud in the plumbing setout from water inlet pipes and connections.

Bowl Capacity: 13 litres

Overflow: Overflow not available.


Fixing: **D.200 Basin Fixing Kit** – Supplied. Bolts directly to the finished wall.

Colours: White only.

Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

* Reference must be made to the AS 1428.1-2009 Amd. 1 to confirm installation requirements.

All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

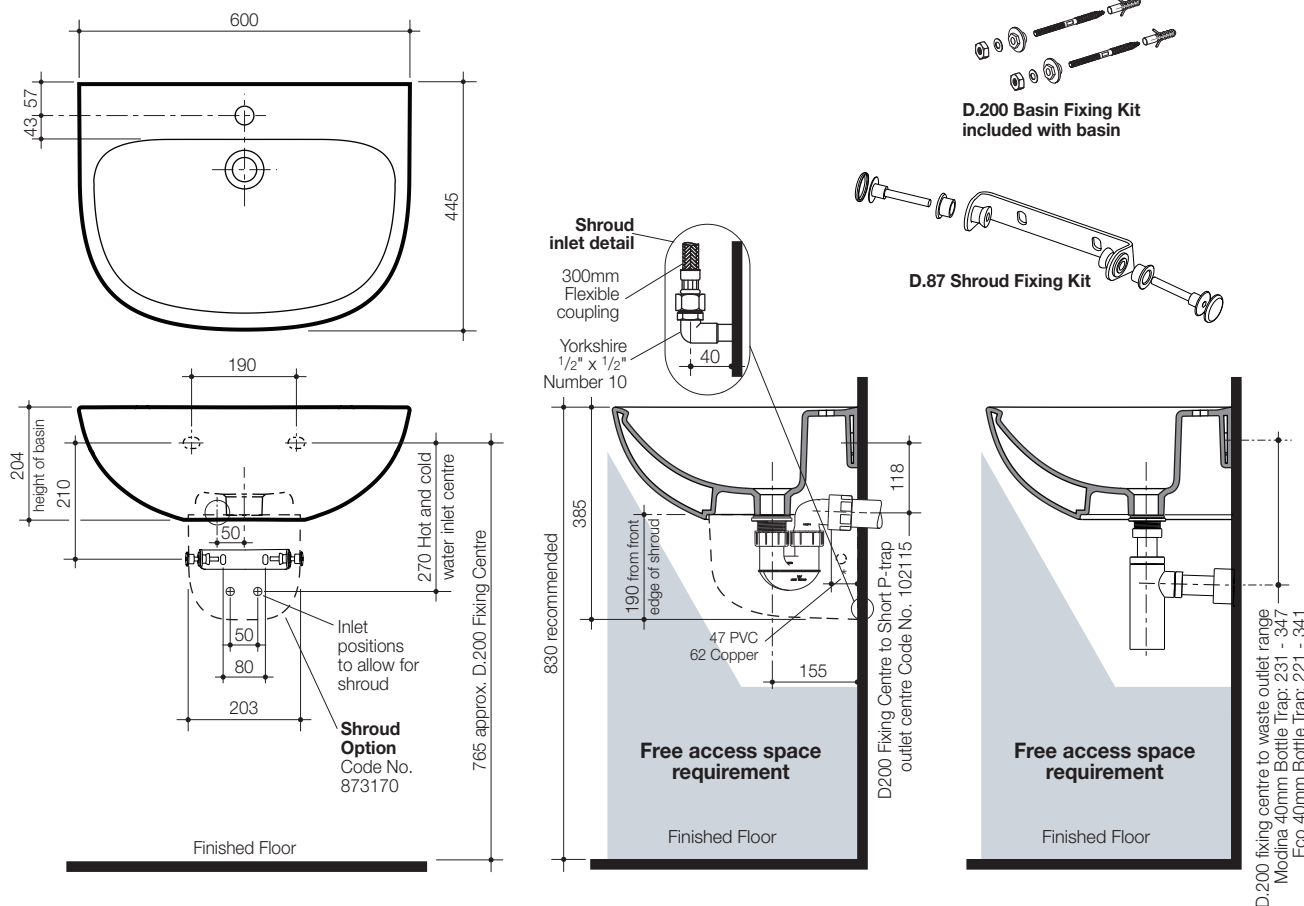

Suitable for installation to comply to Australian Standard AS 1428.1-2009 Amendment No.1 Design for access and mobility