



HYDROTAP G5 CSHA CELSIUS ARC BRUSHED GOLD



CHILLED



SPARKLING



HOT & AMBIENT

FILTERED

UNFILTERED



Order Code H58787Z07AU

Zip HydroTap Design Range CELSIUS Chilled and Sparkling Filtered water, plus Hot and Cold washing up water from a single tap. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and 2 disposable CO2 cylinders.

Manufacturing Code H58787Z07AU

Capacity Residential

Tap	Zip HydroTap Design Range CELSIUS ARC Tap (Brushed Gold)
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold and Hot
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	0.18kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W280mm x D429mm x H333mm
Product Approvals	WaterMark, RCM, ARC
Wels Rating	5 Star, 5.5 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)


Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. **Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.**
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Installation Detail

Ventilation requirements Contact your local service provider if ventilation is not suitable


Option 1. Cupboard with 40mm min overhang

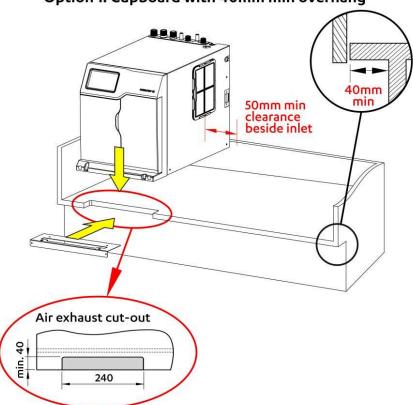

50mm min clearance beside inlet
40mm min

Air exhaust cut-out
min. 40
240

Option 2. Cupboard with less than 40mm overhang

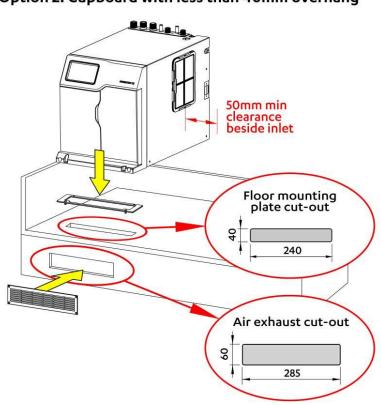


50mm min clearance beside inlet
Floor mounting plate cut-out
40
240

Air exhaust cut-out
60
285


Tap detail

Celsius Arc Tap

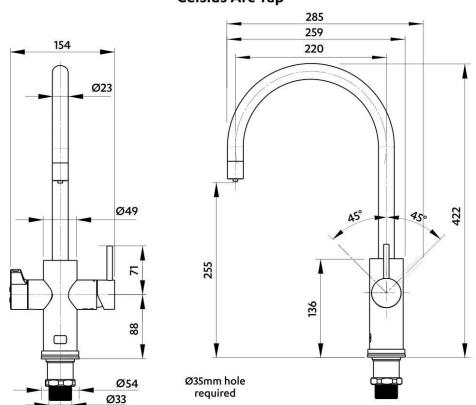

Ø35mm hole required

Mains hot water supply installation
Hot and cold water supply required

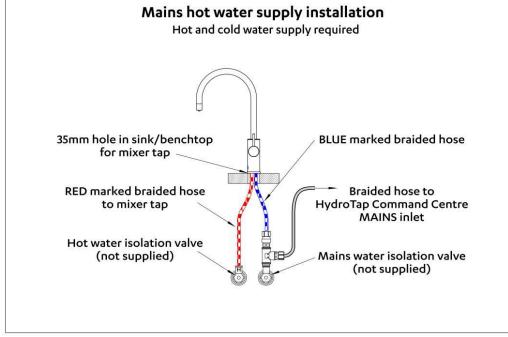

35mm hole in sink/benchtop for mixer tap
RED marked braided hose to mixer tap
Hot water isolation valve (not supplied)
Braided hose to HydroTap Command Centre MAINS inlet
Mains water isolation valve (not supplied)

Tap Positioning
Position the Tap to dispense into the sink.
Ø35mm hole for Tap

Clearance Envelope

4mm buffer pad air space

CO₂ gas cylinder

A minimum overhang or kickboard height is required for ventilation. Refer to the installation instructions.

333
200 min.
280
50 min.
380
429

SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

HydroTap G5
CS Home
shown with Celsius Arc Tap