



Color Variants

VR414110
Stainless steel
Width 38 cm

Included accessories

- 1 x cast pan.
half size.
- 1 x grease drip tray.
- 2 x cast iron grill.
- 1 x lava stones.
- 1 x cleaning brush.

Optional accessories

VA461001
Cast pan, enamelled, full size

VR414110
Vario electric grill 400 series
Stainless steel
Width 38 cm

2 separately controlled zones
Cast pan, half size, for simultaneous
frying and grilling on two separate
surfaces
Open cast grill, lava stones
Solid stainless steel control knob
Precision crafting of 3 mm stainless
steel
For surface mounting with a visible
edge or for flush mounting
Can be combined perfectly with other
Vario appliances of the 400 series

Handling
Control knobs with illuminated
ring, cooking zone and output level
markings.
Electronic control in 12 output levels.

Features
Cooktop, lava stone trough and grease
collecting insert from stainless steel.
2 independently controlled grilling
elements (1500 W).
Two-part cast grill.

Safety
Safety shut-off.

Planning notes
Depending on the type of installation
(surface-mounted or flush-mounted,
with or without an appliance cover), the
specific location of the cut-out and the
knob positions may vary.
If installing with the appliance cover
VA 440 or filler strip VA 450 take into
account the additional space required
for the depth.
If combining several appliances with
at least one appliance cover, the filler
strip VA 450 is required to compensate
for the depth of the appliance without
the appliance cover.
If combining several Vario appliances
of the 400 series, a connection strip
VA 420 must be placed between the
appliances. Depending on the type
of installation, the corresponding
connection strip must be provided.
In the cut-out, the installation system
requires the side edge to be at least 10
mm for surface mounting and at least
13 mm for flush mounting. Ensure a
continuous cut surface of 90 °.
The bearing capacity and stability, in
the case of thin worktops in particular,
must be supported using suitable
substructures. Take into account the
appliance weight and additional loads.
Additional instructions for flush
mounting:
Installation is possible in worktops
made of stone, synthetics or solid
wood. Heat resistance and watertight
sealing of the cut edges must
be observed. Concerning other
materials please consult the worktop
manufacturer.
The groove must be continuous and
even, so that uniform placing of the
appliance on the gasket is ensured. Do
not use discontinuous lining.
The joint width may vary due to size
tolerances of the combinations and of
the worktop cut-out.
If installing several appliances in
individual cut-outs allow for a division
bar of minimum 50 mm between the
individual cut-outs.
Built-in control panel to be integrated in
the bottom cabinet at drawer level.


Characteristics
Product name/family
Vario/Domino barbecue grill
Built-in / Free-standing
Built-in
Energy input
Electric
Type of control
Electronic
Grill grating material
Cast iron
Required niche size for installation
(HxWxD)
105 x 360 x 492
Width of the product (mm)
380
Dimensions of the product (mm)
105 x 380 x 520
Dimensions of the packed product
(HxWxD) (mm)
350 x 435 x 580
Net weight (kg)
26.0
Gross weight (kg)
29.0
Residual heat indicator
Separate
Location of control panel
Basic surface material
Cast iron
Color of surface
Stainless steel, Stainless steel
Color of frame
Stainless steel
Approval certificates
Australia Standards, CCC, CE, China,
China ROHS 20, Eurasian, G-Mark,
Ukraine, VDE
Length electrical supply cord (cm)

Consumption and connection features
Electrical connection rating (W)
3000
Gas connection rating (W)
Current (A)
16
Voltage (V)
220-240
Frequency (Hz)
60; 50
2018-02-26
Page 1


Panel thickness 16 – 26 mm.
The drawing "Installation of the control
knob" must be observed if the panel is
more than 26 mm thick (there must be
a recess at the rear).
A minimum lateral clearance of at least
100 mm from adjacent heat-sensitive
furniture or from the wall must be
observed.
Appliance can be snapped into the
worktop from above.
Appliance weight: approx. 26 kg.

Connection
Total connected load 3.0 kW.
Plan a connection cable.


Installation with appliance cover/spacer batten;
installation standing proud of surrounding surfaces

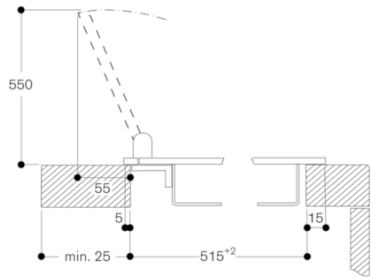

Installation with appliance cover/spacer batten;
installation flush with surrounding surfaces

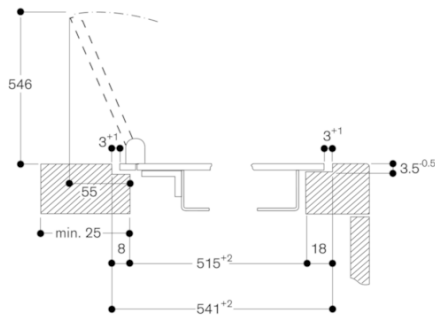


View from above





* with appliance cover or filler strip
(observe the front and rear asymmetrical support,
see separate notes "Installation with appliance
cover/filler strip").

Cross-section

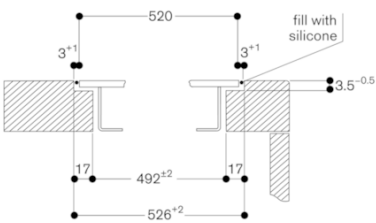

When installing with appliance cover or filler strip, pay attention
to the deeper cut-out and the front and rear groove width.

Longitudinal section

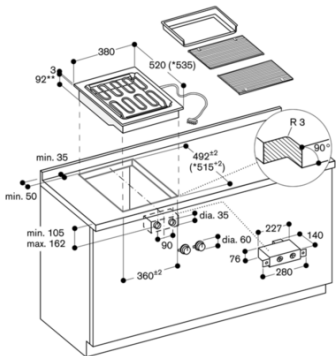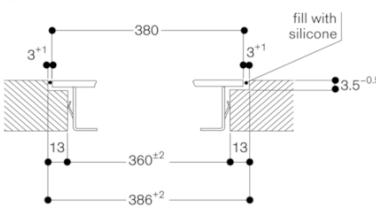

* with appliance cover or spacer batten.
See separate planning notes.
**102 mm in the area of the cable clip (right, centre).

