


C90GMXA

freestanding cooker, 90cm wide

## COMMERCIAL ONLY PRODUCT

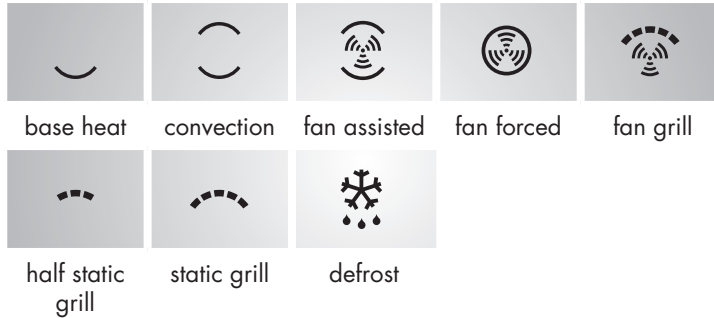

Canali knobs

dimensions: 900mmW x 600mmD x 900mmH

NB: height excludes fitted 63mmH rear splashguard.

NB: actual overall height can be adjusted — from 812mm without supplied telescopic legs to a maximum 912mm height with telescopic legs fitted. The cooker can be positioned on a kitchen cabinet plinth.

EAN 8017709180775

### OVEN

- 126 litre
- seven cooking functions plus defrost
- twin fan forced — 2 x 2000W rear wall elements
- minute minder
- double glazed, thermo-reflective door
- forced air door cooling (Tangential cooling system)
- four shelf heights
- 2 x 25W incandescent lights
- easy cleaning oven enamelling — AA anti acid
- safety-notch trays and shelves
- 41 litre full-width storage compartment
- insulated control panel dials and door handle

**NB** 63mm high rear splashguard supplied for optional fitment

**OPTION:**

stainless steel kickplate, spare part #075470364


### COOKTOP

- spacious six-burner hob, 47.9mj/hr maximum
- three heavy-duty cast-iron trivets
- flame failure device (FFD) fitted to each burner
- automatic electronic flame ignition
- ultra-rapid triple-crown all-purpose burner (wok)
- rapid burner
- two semi-rapid burners
- two low-simmer auxiliary burners
- single-pressed stainless steel hob with rolled edging
- no metal joins eliminates difficult grime accumulation
- satin stainless steel finish
- set for natural gas, regulator supplied
- ULPG adaptable, test point supplied
- 60mm high splashguard supplied (optional fitment to rear of cooktop zone)
- burner skirts, burner caps removable for easy maintenance

C90GMXA

freestanding cooker, 90cm wide

## COMMERCIAL ONLY PRODUCT

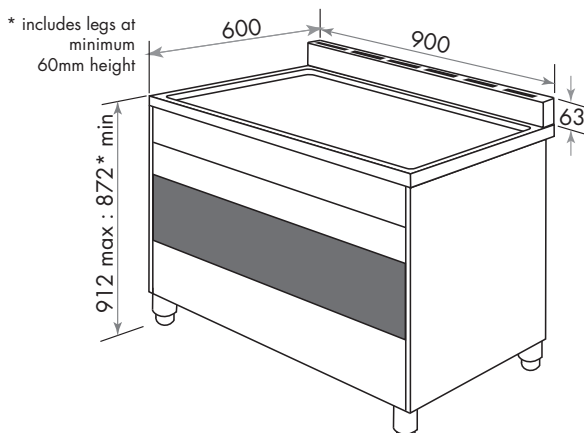

height	minimum 812mm without legs, maximum 912mm with legs fully extended and excluding 63mmH rear splashguard
width	898mm
depth	600mm
net weight	74kg
gross weight	80kg

### OVEN

internal oven dimensions	350mmH x 770mmW x 450mmD = 121.3 litres
net cooking dimensions	340mmH x 750mmW x 420mmD = 107.8 litres
storage compartment	760mmW x 450mmD x 120mmH = 41 litres
electricity supply	240 volt, 50 Hz
electrical connection	hard-wired single phase
maximum current	18.67 amp

### HOB

supplied

- 50.6 mj/hour maximum over six burners
- three heavy-duty cast-iron trivets for full gas hob cover
  - 60mmH x 898mmW splashguard for rear of hob, optional fitment
  - baking/grill tray
  - 1 x chromed-wire shelves
  - 4 x telescopic legs

gas connection

½" BSP gas inlet connection  
½" BSP 1.0 kPa natural gas, regulator supplied  
adapt for ULPG — test point supplied

