

BUILT-IN DUAL ZONE WINE CELLAR

EWTdf 3553



LIEBHERR

Quality, Design and Innovation

LIEBHERR BUILT-IN DUAL ZONE WINE CELLAR EWTdf 3553




Model	EWTdf 3553
Type Category	BI Vinidor
Finish	Own Cabinetry
°Energy consumption (kWh/yr) 24hr	163 0.445
△ Bottle capacity (750ml Bordeaux)	80
Safety glass door	•
MagicEye control system Display	SoftTouch LCD
Digital temperature display	Internal
Tinted glazed door	Triple
Temperature zones	2
Temperature range (°C) Min Max °C	5 20
Suitable for ambient temperature (°C) Min Max	10 43
Interior light	Dimmable LED
Hand crafted beech wood shelves	9
Shelves mounted on telescopic rails	8
Presentation shelf	•
Base shelves	2
Recirculated air cooling	•
Fresh air supply via activated charcoal filter	1
Child proof lock (control panel)	•
SoftSystem hinge - assists door closure	•
Reversible door hinges	•
Key lock	N/A
Label holders	•
Compressors	1
Door open warning signal	•
Temperature alarm	•
Malfunction warning signal	•
Ventilation switch	•
Adjustable height	•
Automatic defrosting	•
Optional extra stainless steel frame and handle	• Item Code: 39901573


Technical Information

Default hinge	Right
Gross weight (kg) Net weight (kg)	98 88
Voltage (V) Rated current (A)	220 - 240 / 1.0
Made in	Austria

KEY: BI = Built-In, ° = Measurements taken at +25°C ambient and +12°C interior temperature tested by Liebherr Germany (not to Australian standards), △ = Based on Bordeaux 750ml bottle - capacity may vary depending on bottle shape and size.

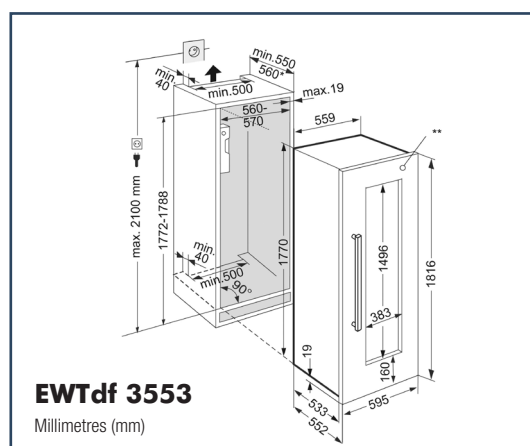


Whilst every effort is made to ensure all specifications and information in this flyer are correct at time of printing, Andi-Co Australia Pty. Ltd. reserve the right to make changes without notification. Where actual appliance measurements, specifications and ratings are crucial, we recommend that the actual appliance installation instructions that accompany each appliance be checked. Andi-Co Australia will not be liable for any loss.

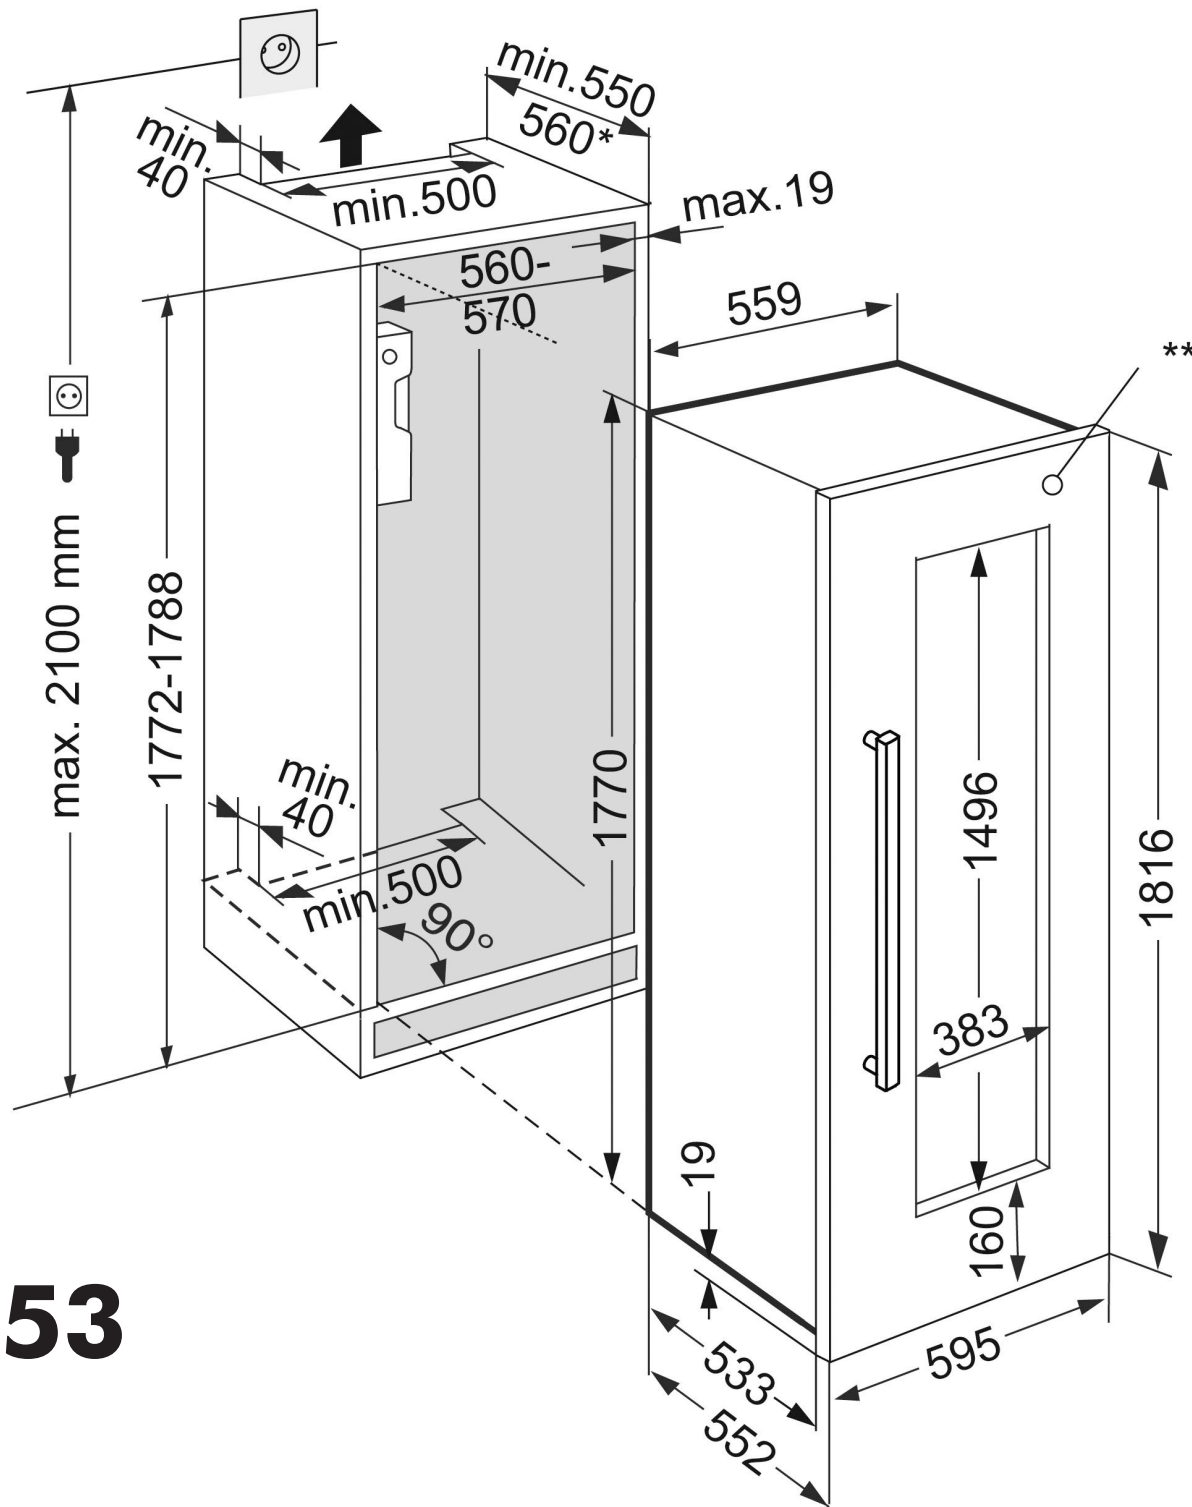


EWTdf 3553

Millimetres (mm)


VENTING ABOVE CUPBOARD

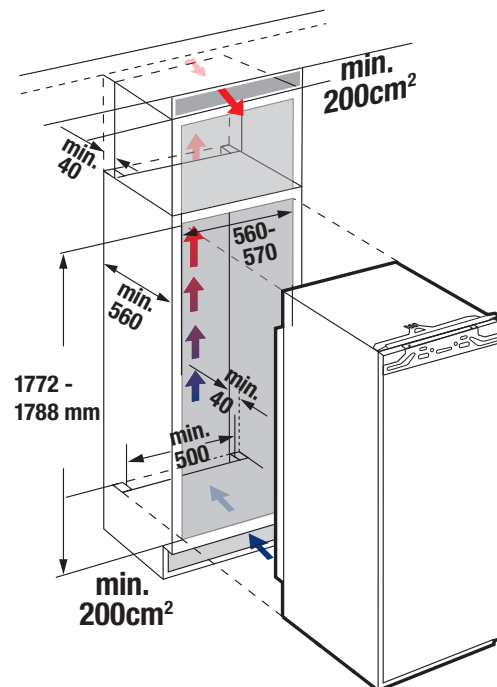

VENTING INTO CEILING SPACE*

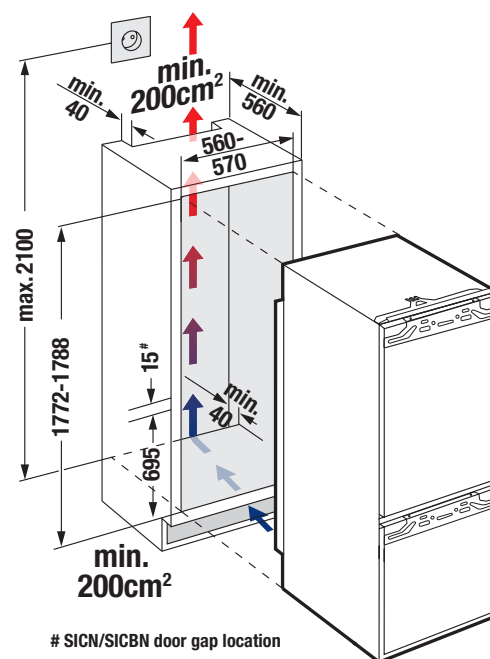

VENTING AT TOP OF UNIT

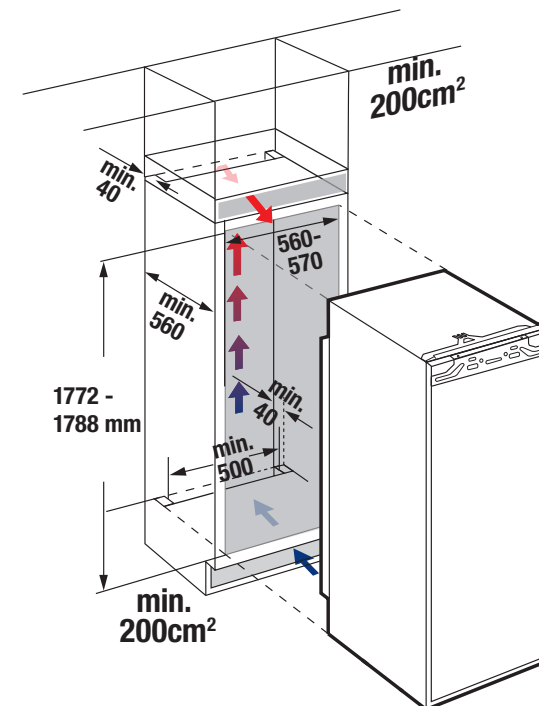

Figures 1, 2 and 3 represent the alternate ways that Liebherr integrated appliances can be installed to ensure correct ventilation requirements are achieved.

Arrows denote airflow from ventilation entry to exit point. The ventilation options are applicable to the following models: SICBN 3356, SICBN 3366, SICN 3356, SICN 3366, SIGN 3576, SIKB 3550 & EWTdf 3553.

* Ceiling spaces and bulkheads must be well ventilated.