

AFR6X

60cm built-in rangehood with glass visor



SIZE mm 598W x 158H x 280-460D

FINISH fingerprint-proof stainless steel

FEATURES

• 3x aluminium fi Iters

• carbon fi Iter included

recirculation vent
3 speeds, slide control
270m³/hr airflow

• 2 x incandescent lightglobes

Ø120mm ducting | recirculation kit available

10 amp electrical connection, 3-pin plug and cord

POWER 220-240 V, 50 Hz

input power: 120W



EAN 9347777001054

DISCLAIMER


Eurolinx PTY LTD is continually seeking ways to improve the design specifications, aesthetics and production techniques of its products. As a result alterations to our products and designs take place continually. Whilst every effort is made to produce information and literature that is up to date, this brochure should not be regarded as an infallible guide to the current specifications, nor does it constitute an offer for the sale of any particular product. Product dimensions indicated in our literature is indicative only. Actual product only should be used to define dimension cutouts. Distributors, and retailers are not agents of Eurolinx and are not authorized to bind Eurolinx by any express or implied undertaking or representation.

AR210316



AFR6X

60cm built-in rangehood with glass visor

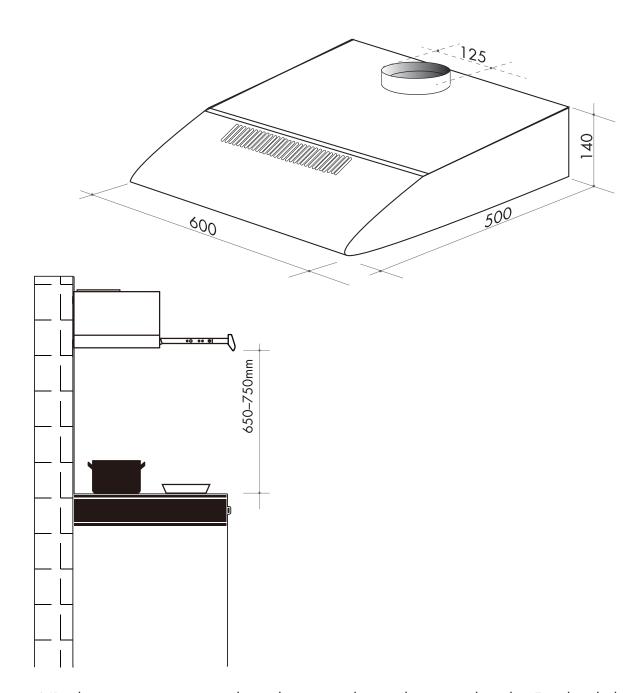

NB: drawings are not to scale — they are to be used as a guide only. For detailed installation instructions, please refer to user guide.

Australia National Telephone Number 1300 694 583 New Zealand Telephone Number 0508 458 369 ARTUSI showrooms are open daily from 9am-5pm and Saturdays 10am-4pm

artusi.com.au

NSW & ACT (head office)

48 Moore Street Leichhardt 02 8569 4699 VIC | SA

1211 Toorak Road CAMBERWELL

03 9809 2155

TASMANIA

03 6272 7386

QLD

1/42 Cavendish Road COORPAROO 07 3397 0850 10/55 Howe \$

08 9201 9188

WA | NT

New Zealand

eet PO Box 11.160
Sockburn Christchurcl
03 344 5913