


**crest**

**Smart Lock**

# SMART PASSKEY

LOCK BOX

SHLBL

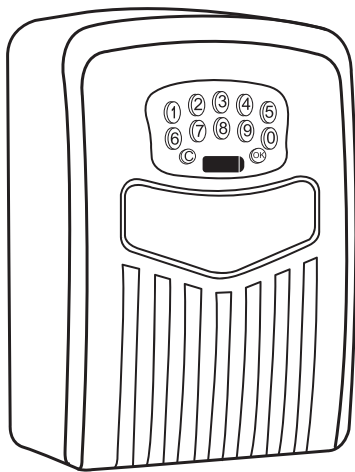

**App  
Unlock**



**Rechargeable  
Battery**




**IP65  
Water Resistant**



## Know your Lock:

1. Numeric Keypad
2. Micro-USB Access Port
3. Metal Outer Casing

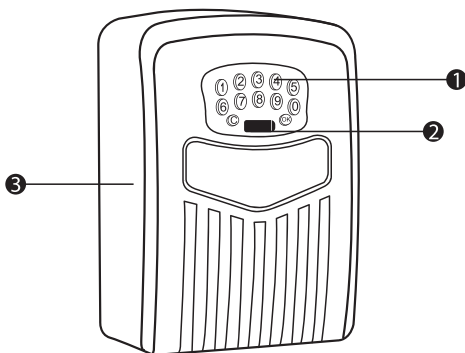

## Note:

1. The 4 AAA alkaline batteries are not included.
2. With the supplied Micro-USB cable, plug one end into the lock charging port and adequate power supply. Enter 123456+0K button to open the door to install the batteries before getting started.
3. After the lock box is configured, the initial password 123456 will be invalid and needs to be modified in the password settings within the App.
4. The lock requires a network connection to set passwords, view records and remove devices.
5. The additional family members are set up as administrators, with all permissions to set and modify passwords, share devices, and view records.

Other members who join the group via invitations are ordinary users and have limited access to unlock via mobile phone or the passwords shared by the administrator.

## More Functions:

**Users:** Add/manage/remove family members, friends or visitors (by adding their App Account) to your lock so they will have access to your lock at a designated time period or permanently.

**Unlock Logs:** A list of unlock records.

**Linkage Setting:** You can set “if this then that” linkage on this function.

## Specifications:

Keypad:	12 Digit Keypad
Material:	Zinc Alloy/ABS
Battery Size:	4 x AAA Alkaline (Not included)
USB Interface:	Micro-USB 5V DC
External Size:	145 x 105 x 55mm
Internal Size:	112 x 80 x 28mm
IP Rating:	IP65


## Accessories Included:

Key Lock Box	x 1
Mounting Template	x 1
Micro-USB Cable	x 1
Mounting Bolts	x 4
Mounting Screws	x 4

## Low Power Alert:

The lock details within the App will show the battery status. If the batteries do go flat, you can power the device via the Micro-USB access port and a power source like a power bank to power up the device to unlock and change batteries.

## Share Device:

- Step 1. Ensure the lock and device are within 5m of each other
- Step 2. Select the lock and enter the lock page
- Step 3. Select the 
- Step 4. Select “Share Device” tab
- Step 5. Select “add Sharing” This will share a link to the lock within the Crest Smart App. If you select the “More” tab you will be able to choose what platform you wish to share the link with

## Disconnect (Reset to Factory Mode):

Step 1: Tap  on the lock's homepage (top-right)



Step 2: Tap "Remove Device"

Step 3: Tap "Disconnect and wipe data"

### NOTE!

**All fingerprints previously set will be deleted if you choose "disconnect and wipe data"**

Step 4: Tap "Confirm" to disconnect the lock from your App account, the lock is now reset to the display/factory mode and will be able to be unlocked with the factory passkey of 123456+OK

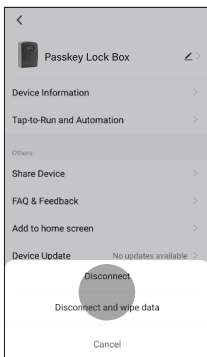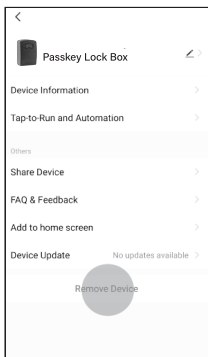

## Download The Mobile App:

You can search Crest Smart in the iOS App Store (Apple) or Google Play Store (Android), or scan the QR code to download Crest Smart App

**Note:** You will need to be within a 5m range for App connection to the lock for initial set up, updates and for normal operation




## Powering Up Lock – First Time:


- Step 1. Plug the Micro-USB cable into the charging port and to an adequate power supply to power the device for the initial unlocking
- Step 2. Enter factory password 123456 + the OK button to unlock and open
- Step 3. Install 4 AAA Alkaline batteries (not included)

## Connect your Lock With App:

- Step 1: Open the App, register an account
- Step 2: Tap **+** on the App
- Step 3: Tap "Go to add"

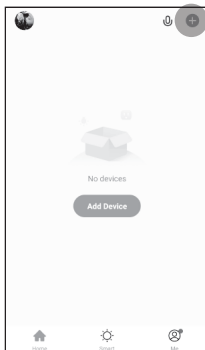

- Step 4: Tap "NEXT" (Device added successfully)

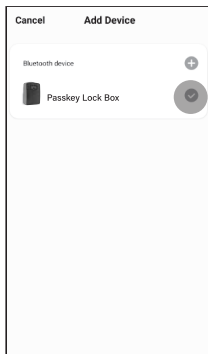

## **Temporary Password Types:**

(Passwords don't show on records)

1. Time-limited Password: Valid within a 24hr time period
2. One-time Password: Valid within a 6hr period and can only be used once
3. Dynamic Password: Valid within a 10min period and can be used multiple times
4. Clearing Password: Valid within a 24hr period (clears previous time limited passwords)
5. Custom Password: Set custom passwords (lock must be connected to the users device)

## **Temporary Password Management:**

Password Sharing Settings: The receiver must have downloaded the App and have a linked account set up

Step 1. Log into the App - Select the lock and select "Temporary Code" menu

Step 2. Select the Code style

Step 3. Select the type (Time-Limited, One-Time, Dynamic, Clearing or Custom)

Step 4. If custom code is selected enter the 6 to 10 digit code of your choice

Step 5. Select the effective and expiration times to take effect

Step 6. Assign a name for the temporary password

Step 7. Select "Save" for all settings to take place

## **Mobile Phone Password Setting:**

Step 1. Log into the App and select the lock and enter the "Temporary Code" menu. Select the "Bluetooth" menu

Step 2. Select code type (Time-limited or One-time) option

Step 3. Select the Country/Region for correct Country Code

Step 4. Complete the mobile number or email address for the recipient

Step 5. Complete the effective time and also expiration time for the password

Step 6. Assign a name for the temporary password

Step 7. Select "Send" for all passwords to take place

## **App Lock:**

- Step 1. Log into the App and select the lock (if not available tap “Tap to connect the device” this will re-pair the lock to the device. You will need to be within 5m for this to connect
- Step 2. Slide the key icon towards the padlock icon on the bottom of the screen to unlock the lock


## **Password Unlock:**

- Step 1. Enter the set password and press “OK” on the keypad

## **View Access Log:**

- Step 1. Select the log Tab – View time of activations and linked users in this view

## **Remove Device:**

- Step 1. Ensure the lock and device are within 5m of each other
- Step 2. Select the lock and enter the lock page
- Step 3. Select the 
- Step 4. Select the “Remove Device” tab
- Step 5. Either select the “Disconnect” or “Disconnect and wipe data” options
- Step 6. Confirm or Cancel the option

## **Settings:**

**Remote Unlock:** This option will allow you to turn OFF/ON the remote unlock option.

Proudly brought to you by:



PO Box 5658 Brendale  
QLD Australia 4500  
Customer Support  
1800 812 261  
[www.crest.com.au](http://www.crest.com.au)  
**AUSTRALIAN OWNED**



Please note, not all options within the App  
maybe be available for the lock due to future  
App and product software updates